

Cor-3000 System with thermal break



Cor-3000 System with thermal break

Transmittance

Uw from 1,3 (W/m²K)

Please consult typology, dimensions and glass

Acoustic insulation

Maximum glazing: 31 mm.

Maximum acoustic insulation **Rw=46 dBA**

Finishes

Possibility of dual colour

Colour powder coating (RAL, mottled and rough)

Wood effect powder coating

Anti-bacterial powder coating

Anodized

Categories achieved at test centre

Air permeability
(EN 12207:2000): Class 4

Water tightness
(EN 12208:2000): Class 9A

Wind resistance
(EN 12210:2000): Class C5
Reference test 1,18 x 1,18 m. 2 sashes

Possibility of straight or curved sashes and beads

Possibility of incorporating hardware with concealed hinges.

Possibility of incorporating security hardware - Evo Security.



Sections

Frame 45 mm.





Sash 53 mm.

Profile thickness


Window 1,5 mm.

Door 1,7 mm

Polyamide strip length 14,6 mm.

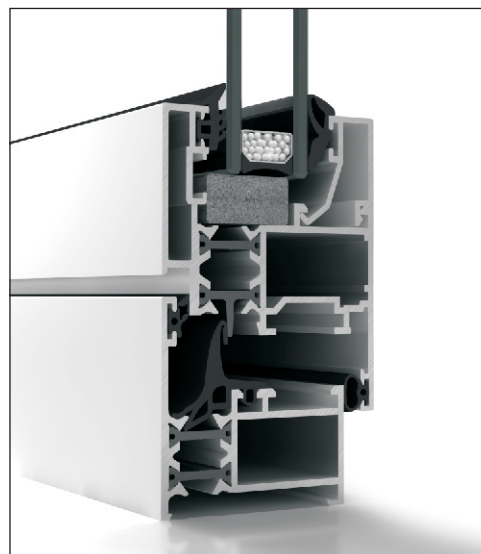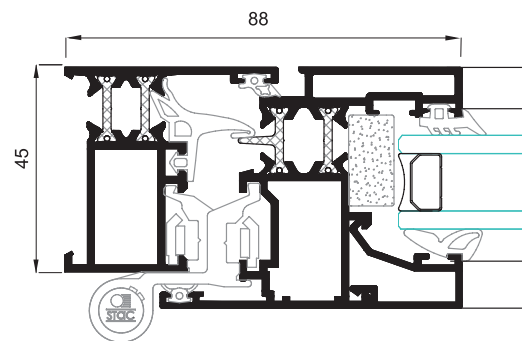

Opening possibilities

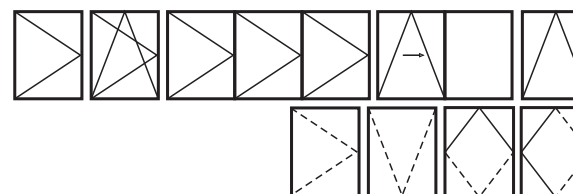

Open in: practicable, turn-tilt, folding, parallel tilt, hinged.

Open out: practicable, projecting-sliding, pivoting on horizontal or vertical axis

Maximum dimensions

Width (L) = 1.500 mm.

Height (H) = 2.400 mm.

Single sash window, turn-tilt

Please consult regarding maximum weight and dimensions for other opening types

Maximum weight/sash

120 Kg.